

TFP-1240

REPEATER PANEL





Teknim TFP-1240 repeater panel is developed to monitor and intervene fire detection systems from different points at large and medium scale enterprises. It can be connected approximately up to 1.000 meters distance from main panel over RS-485 communication layer. Slim and aesthetic design fits into any office environment, guard kiosk, recep-

tion desk etc. Power is supplied directly from the panel without an external power supply. All features provided on the main panel are also available on the repeater panel. All 72 zones on the loop are displayed on LCD screen of TFP-1240 repeater panel.

GENERAL SPECIFICATIONS

- Easy to read, 240*64 wide LCD graphic display
- User-friendly interface enables easy viewing of alarms, errors and warnings
- Easy connection with the main panel
- Real-time, stabilized communication via RS-485 communication structure
- Cable connection distance up to 1 Km with main panel
- Robust body, stylish design

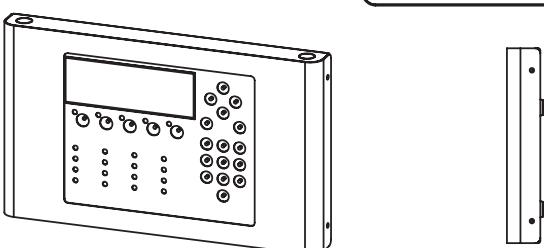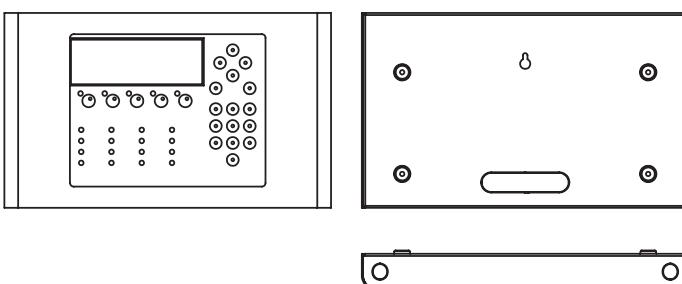

Technical Specifications TFP-1240

Zone Indicator	Yok
Main Supply Voltage	24±4 VDC
Maximum Consumption	0,15A @24 VDC
Cable Type and Distance	J-Y (ST) Y-L9 1000 mt 0,8 mm

Mechanics

Weight	2,6 kg
Dimensions (mm)	230 x 386 x 40 mm
Body material and color	Metal - Light Grey and Red

Environmental

Operating Temperature	-10C ~ 55C
Humidity	95% RH
Protection Class	IP30